




FITTING INSTRUCTIONS

Product:	TJM Airtec Snorkel (Short Body)
Vehicle:	Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)
Part No.	011SAT0134G & 011SATW0134G

- Before commencing installation of this product – Please read the instructions carefully, ensure that the air box configuration is the same as shown in the images of these instructions
- Check all listed components are supplied in the kit.
- Estimated Fitting Time: - Approximately 2 Hours
- Left hand and Right-hand components are determined as seated in the vehicle looking forward.
- Always place the product on a flat level bench or surface, cover with a soft cloth or blanket to prevent damage to parts prior to installation.
- When removing protective coatings, ensure all new edges are deburred, clean any swarf from the area and apply rust preventative product to exposed painted surfaces where applicable.
- To provide adequate sealing of the snorkel system all joints and openings must be sealed using neutral cure silicone.

IMPORTANT: - If the vehicle has a one way drain valve - Do Not seal it - As water entering through the snorkel head needs to drain. TJM recommend frequent inspections of the valve to confirm the air box is not retaining water - Especially after water crossings.

- The fitment of this TJM product does not nullify the OE manufacturer's operating guidelines and/or warnings. Ensure you are familiar with and adhere to the usage instructions specified by the manufacturer in the owner's manual or other official documentation.
- Tools Needed for Installation: - Metric Socket & Spanner Set, Screwdriver Set, Electric Drill, Metric Drill set, Ø 95 Hole Saw, Trim Removal tool and a Tube of Black Neutral cure silicone and a tube of Loctite or similar.
- Safety glasses hearing protection and gloves should be used / worn when performing relevant Tasks during this installation



For product warranty please refer to our website www.tjm.com.au



FITTING INSTRUCTIONS

Product:	TJM Airtec Snorkel (Short Body)
Vehicle:	Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)
Part No.	011SAT0134G & 011SATW0134G

Bolt tensions	Dia. (mm)	Nm	ft.lbs	Dia. (inch)	Nm	ft.lbs
All bolt tensions are as follows unless otherwise specified.	5	5	4	1/4"	9	7
	6	9	7	5/16"	22	15
	8	22	16	3/8"	33	27
	10	44	32	7/16"	55	43
	12	77	57	1/2"	86	66
	14	121	90	-	-	-

PARTS LIST		
DESCRIPTION	QTY	PART No.
Snorkel Body	1	011MB00134G
Intermediate Tube	1	011IP000134G
Airbox Pipe / Connector	1	011AC00134A
Door ("A") Pillar Bracket	1	F-13816
Hose Clamp - (S/S) attached Air box pipe to Intermediate	1	HC060
Hose Clamp – (S/S) attached To Intermediate Pipe	1	HC052
Fitting Instructions	1	F-30552
Paper Template – Outer Guard	1	F-30552-T
Paper Template – Inner Guard	1	F-30552-T

BOLT KIT	
DESCRIPTION	QTY
M8 x 1.25 x 16mm Hex Head Bolt	2
M8 Spring Washer	2
M8 Flat Washer (Small)	1
M8 x 16mm Button Head (Black)	1
M8 Spring Washer (Black)	1
M8 x Ø17mm Flat Washer (Black)	1
M8 x 1.25 x 30 Stainless Steel Studs	3
M8 x large Mudguard Washer	5
M8 Nyloc Nut	3
3/4" x 8G Stainless Steel PK Self tap Screw	2

011SAT0134G ONLY		
Air Ram Top	1	011AR14B97T

011SATW0134G ONLY		
Wedgetail Top	1	011AIRWT450

For product warranty please refer to our website www.tjm.com.au



FITTING INSTRUCTIONS

Product: TJM Airtec Snorkel (Short Body)
Vehicle: Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)

Part No. 011SAT0134G & 011SATW0134G




1. Position the vehicle on a hoist (where possible) for access to inner guard area.
A Flat Level Concrete surface is also suitable if a Hoist is not available.
2. Access to the mud flap and Wheel arch (inner fender liner) will be Required.
3. Jack up the front of vehicle and remove the Right-hand side front wheel - If Required to access the Mud Flap and Wheel arch (inner fender liner) Clips and fasteners. Alternatively Place the steering on full Lock for access to the Clips.



4. Remove the Mud Flap from the vehicle – Mud flap is held on with screws in four places.

Also Remove all the Visible clips holding the wheel arch liner (Inner Fender) From the Vehicle - Retain all of fasteners / plastic clips for re-use.

Remove all fasteners

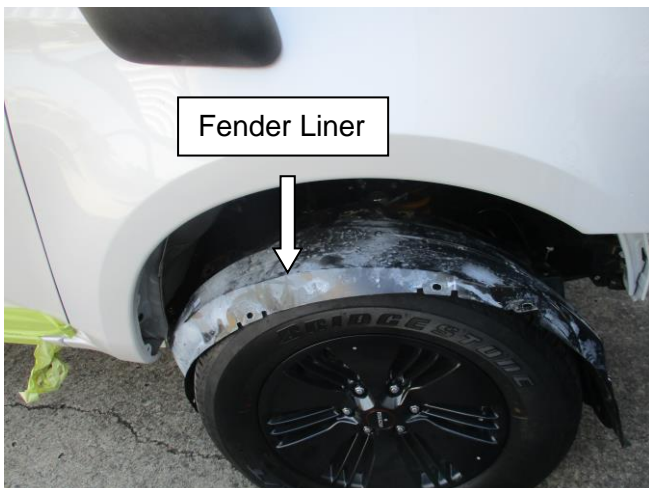

5. With the wheel arch liner (Inner Fender) clips Removed from the Vehicle – Access to the inner fender Area is now accessible.


For product warranty please refer to our website www.tjm.com.au




FITTING INSTRUCTIONS

Product: TJM Airtec Snorkel (Short Body)
Vehicle: Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)

Part No. 011SAT0134G & 011SATW0134G

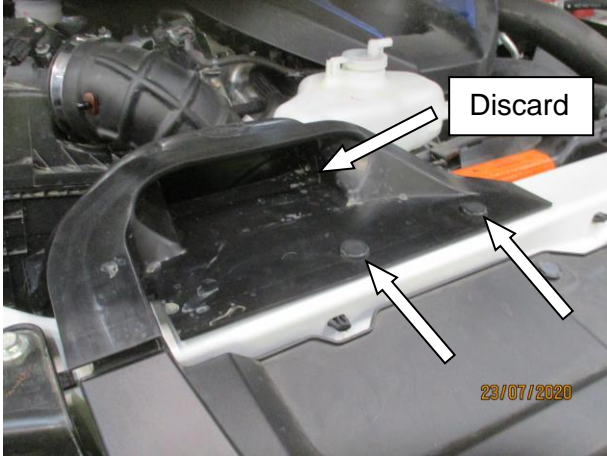

6. Remove the forward-facing air intake from the vehicle by removing the front two plastic clips and uncoupling it from the air box.
7. Discard the air intake as it is no longer required. Reinstall the two plastic Clips into the existing holes.

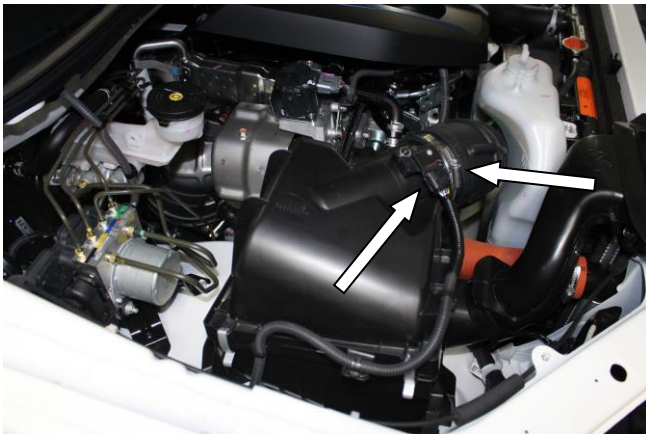

8. Loosen the hose clamp securing the intake hose to the airbox lid and disconnect. **It is recommended** to Cover the intake hose with a plastic bag or similar so no foreign matter can enter the engine.
9. Disconnect / unplug the Sensor and any additional sensor fittings from the airbox lid. Place out of the way as the air box needs to be fully Removed.



10. Unclip the clamps on the Front and rear of the airbox to remove the airbox lid and remove the air filter element. Remove / unclip the wiring Loom that is attached to the airbox lid.
11. Relocate / Move the Engine intake pipe to enable the next step – **Removal of the Air box Base.**

For product warranty please refer to our website www.tjm.com.au




FITTING INSTRUCTIONS

Product:	TJM Airtec Snorkel (Short Body)
Vehicle:	Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)
Part No.	011SAT0134G & 011SATW0134G




- Remove the bolts that secure the airbox base to vehicle and retain for refitting – bolts are located at the front and rear of the airbox base.
- Totally Remove the airbox base from the engine bay area to provide access to the inner guard (Fender).

Hole Position for Air box Refer Step 14 Next (Below)

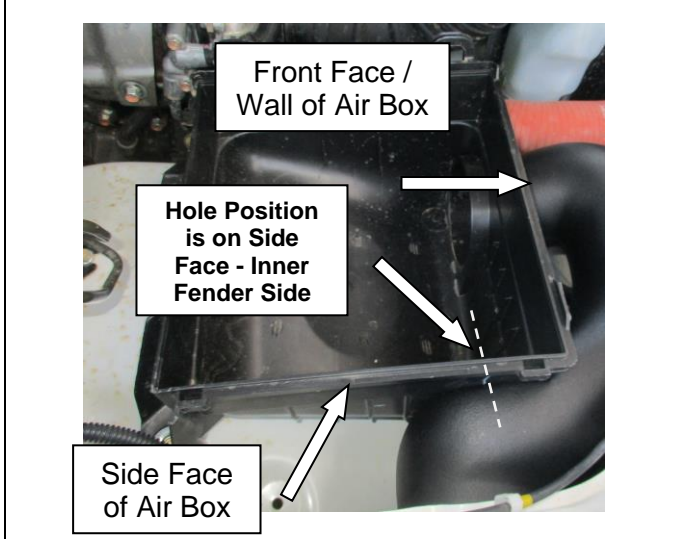


- New Airbox Pipe to Airbox Base –** a \varnothing 14 mm hole is to be drilled into the airbox base to retain the New airbox pipe to the Airbox.
- Important: - The out Board / Side face of the Air box –** Adjacent to the inner fender is where the hole is located. **Check before drilling Hole is in the Right-Hand face when viewed from the front of the Vehicle.** Refer to the Picture for the Airbox Base Orientation & Face /surface that is to be

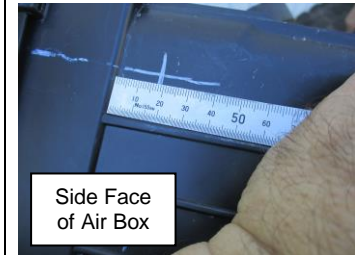

Step 16
**Down
18 mm**

- On the Front face of The Air Box base from the Horizontal molded Ridge - measure down 18 mm and mark as shown.

Step 17
**Across
19 mm**

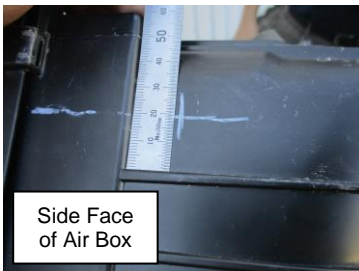


- Then on the same surface but from the vertical ridge this time measure towards the outside 19 mm and mark as shown. Using a \varnothing 14 mm Drill Bit, Drill a hole through the air box in the marked position.




FITTING INSTRUCTIONS


Product:	TJM Airtec Snorkel (Short Body)
Vehicle:	Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)
Part No.	011SAT0134G & 011SATW0134G

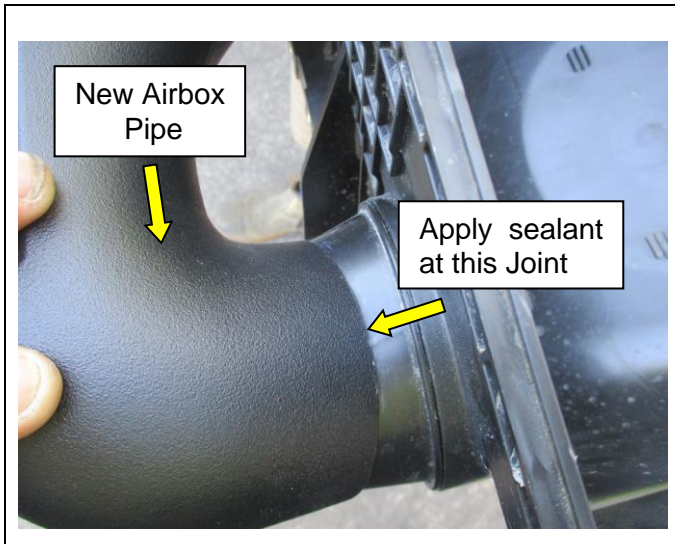

- 18. Apply a bead of neutral cure silicone to the inlet pipe section of the Airbox base – where the New Inlet pipe slides over to totally seal the inlet pipe to the airbox.
- 19. Retain / Bolt the New Airbox Pipe to the Airbox Base with the M8 Bolt and Large washer as shown using the New Hole drilled in step 17 Above.

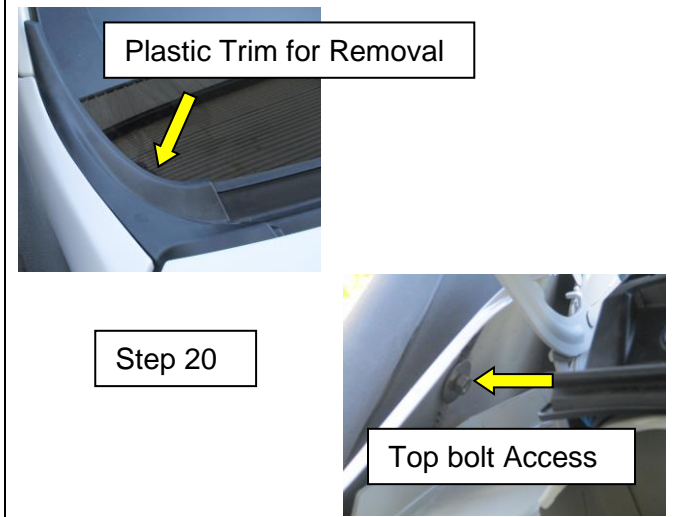

- 20. To attach the snorkel body to the vehicle – there are three M8 bolts, to access the top bolt the plastic trim panel located at the base of the windscreen needs to be carefully removed to provide access to the top bolt hole.
- 21. The two other bolts are accessible from up under the inner Guard / Fender area (Inner Guard Cavity)

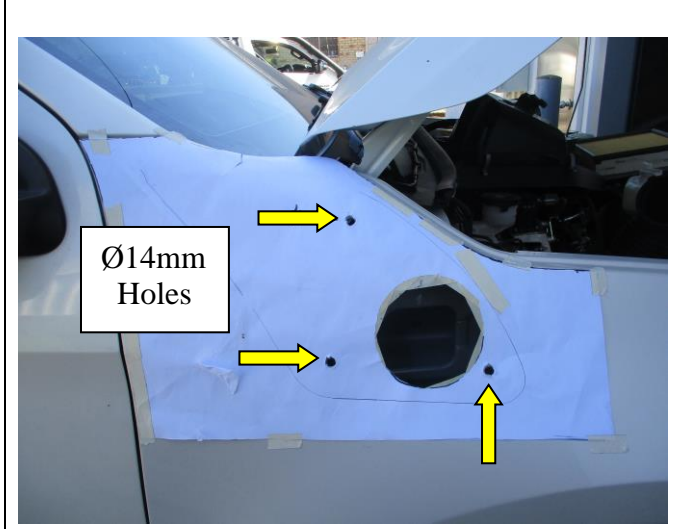





- 22. **Main Snorkel Body to Vehicle:** - Cut out the paper Guard / Fender template supplied in the fitting kit. Confirm the template number is F-30552-T1
- 23. Attach the Template to the driver's side Fender using the Template supplied, align to the vehicle using the Marks provided. First Drill the 3 x Ø14 mm holes in the guard (Fender) where marked then Drill the Ø95 mm Hole – as shown.
- 24. Apply rust preventative product to the exposed edges of both holes.



FITTING INSTRUCTIONS

Product: TJM Airtec Snorkel (Short Body)
Vehicle: Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)

Part No. 011SAT0134G & 011SATW0134G

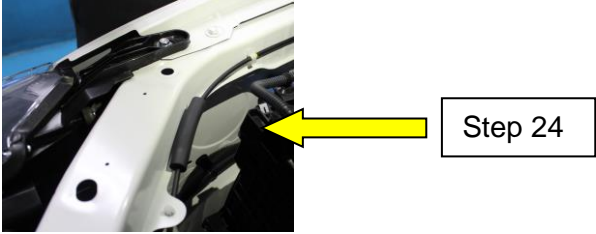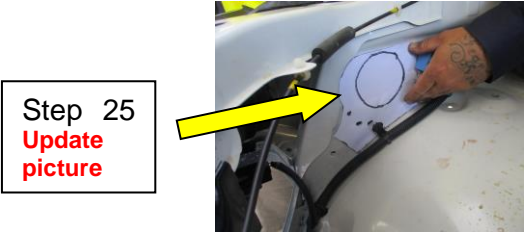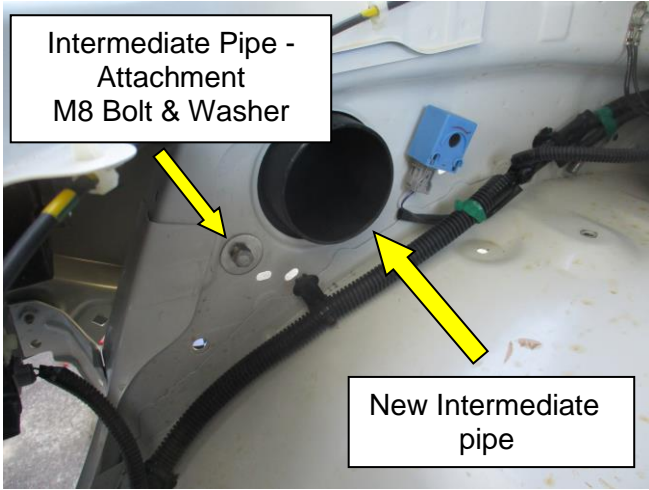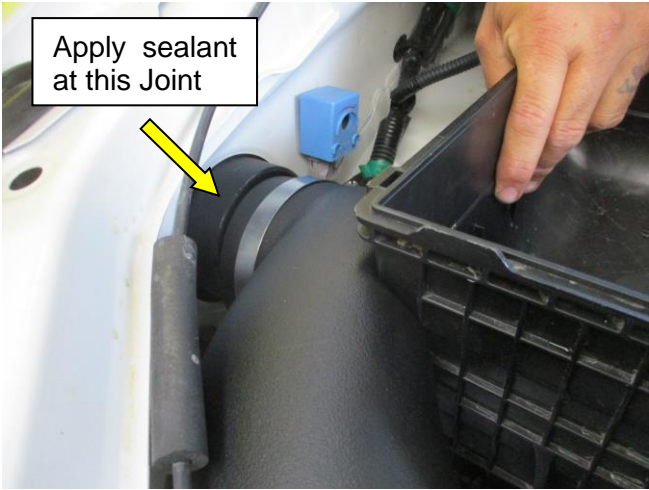



 	<p>25. A New hole is required in the inner guard (Fender) for the New Snorkel pipe work. Cut out the paper guard / Fender template supplied in the fitting kit. Confirming the template number is F-30552-T, Use the Reference marks on the template to align to the correct position on the vehicle.</p> <p>26. First Drill a Ø14 mm hole in the Inner guard (Fender) using the template then the Ø95 mm Hole as shown. Apply rust preventative product to the exposed edges of both holes.</p>
	<p>27. The New Intermediate Pipe can now be located & installed – Placing the elbow through the Newly Drilled Ø95 mm hole.</p> <p>NOTE: - The end of the Intermediate pipe with the Brass nutsert is placed at the Airbox end.</p> <p>28. Retain / bolt the Intermediate Pipe to the inner guard / fender with the M8 Bolt and Large washer as shown.</p>
	<p>29. Installation of the Airbox base Back into the Vehicle:- Before Re installing the Airbox base to the vehicle Apply a bead of neutral cure silicone to the inlet pipe section where it slides over the intermediate pipe to Totally seal the joint line. Wipe of any excess Sealant.</p> <p>30. Re - Install the Airbox Base to the vehicle sliding the Airbox pipe into the Intermediate pipe as shown. Attach the Hose clamp – Finger tight only at this stage.</p>

For product warranty please refer to our website www.tjm.com.au



FITTING INSTRUCTIONS

Product:	TJM Airtec Snorkel (Short Body)
Vehicle:	Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)
Part No.	011SAT0134G & 011SATW0134G

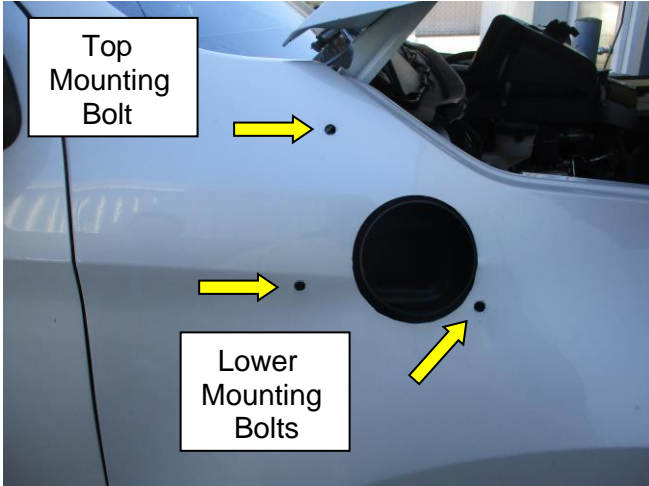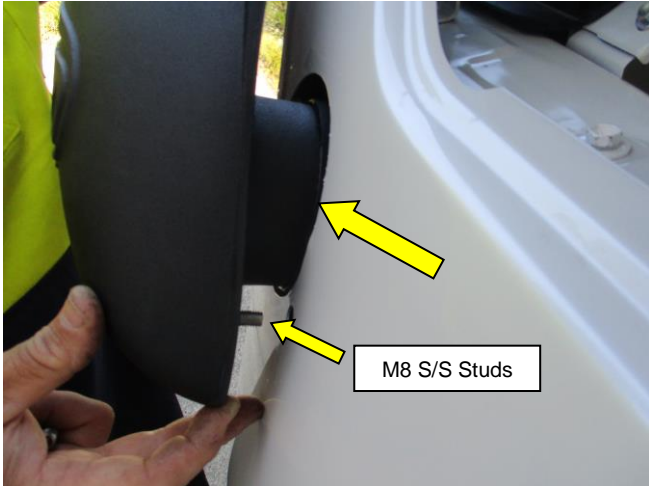 <p>Step 31</p>  <p>Step 32</p> <p>Tighten</p>	<p>31. Bolt the Air box base Back into position as (Removed in step 13) , Tighten all bolts. Once the air box is Re Secure - Tighten the Hose clamp on the Engine inlet Pipe.</p> <p>32. Replace the air cleaner element and re attach the airbox lid. Plug in the Sensor, Secure the wiring Loom to the Airbox lid. Ensure all Parts & connections are tight and Secure.</p>
 <p>Top Mounting Bolt</p> <p>Lower Mounting Bolts</p>	<p>33. With the Holes previously drilled in the Fender the Template can now be removed and wipe off & clean any marks on the Guard / Fender.</p> <p>34. Apply tape / protective film to the vehicle where the “A “pillar bracket area is on the vehicle to avoid scratching the paint.</p> <p>35. Attach the “A “Pillar bracket to snorkel using the black M8 x 1.25 x 16mm button head screw, M8 spring washer & M8 flat washer supplied in the kit.</p>
 <p>M8 S/S Studs</p>	<p>36. Fitting the Snorkel Body: - Using Loctite or Similar, Screw the three Stainless Steel studs into the snorkel body and Tighten. Place the snorkel onto the Fender using the Three M8 Bolts supplied – Leave the bolts finger tight at this stage.</p> <p>Note: - Top Bolt Access is where the plastic trim panel was Removed (refer Step 20) – Lower bolts are accessible from up under the inner Guard / Fender area. As noted in step 21</p>


For product warranty please refer to our website www.tjm.com.au




FITTING INSTRUCTIONS

Product: TJM Airtec Snorkel (Short Body)
Vehicle: Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)


Part No. 011SAT0134G & 011SATW0134G

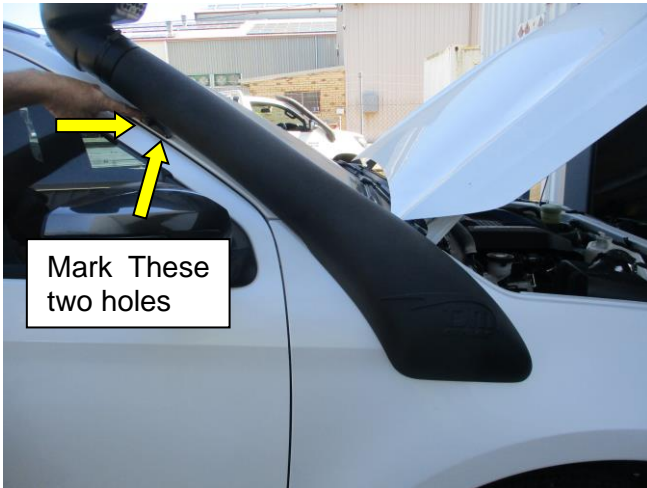

37. Using the “A” pillar bracket as a template, mark the two-hole positions on the “A” pillar.
38. **Note:** - Bracket Position is approx. 10 to 12 mm from outer Edge of Pillar (For Reference – **Check Prior to Drilling**)
39. Remove the snorkel body and pillar bracket from vehicle to Provide access for drilling into the vehicle.
40. **Note:** - **Drill through outer skin of the pillar only.**

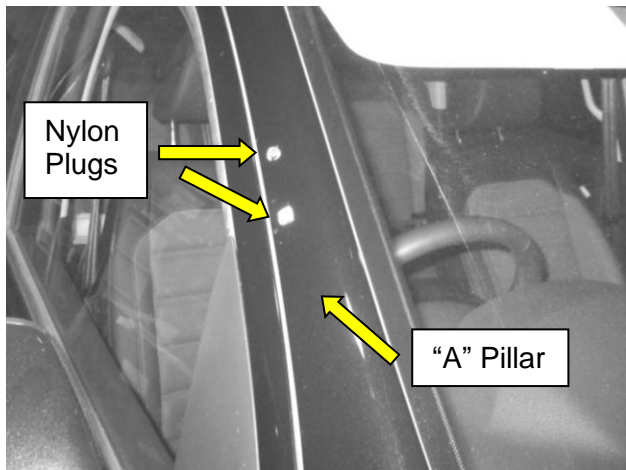

41. Centre punch the two holes as marked. **Caution when Drilling** – Do not Drill too far into the “A” pillar (May Contain Wiring etc) Drill a 4mm pilot hole through the outer skin of the “A” pillar.
42. Drill the skin of both holes out to 8mm. Remove the protective tape from the A pillar. Deburr all holes, clean any swarf from the areas and apply rust preventative product to exposed surfaces & edges.
43. Carefully apply silicone to the 8mm holes and insert the nylon plugs as shown.

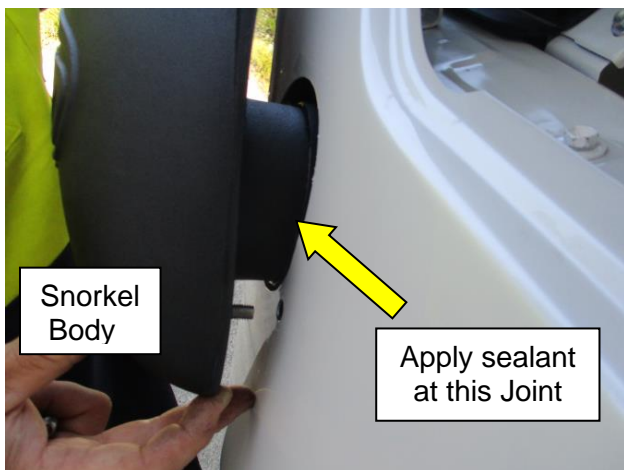

45. Re assemble the A Pillar bracket to the snorkel. Fix the snorkel bracket to the vehicle using the 8G S/S screws.
46. Apply a bead of neutral cure silicone to the Main Snorkel Body pipe section where it slides into the intermediate pipe to Totally seal the joint. Wipe of any excess Sealant.
47. Refit the snorkel body onto vehicle. Check all the connection points on snorkel body, intermediate tube and airbox base, Tighten & check all clamps, wipe off any excess sealant.

For product warranty please refer to our website www.tjm.com.au



FITTING INSTRUCTIONS


Product:	TJM Airtec Snorkel (Short Body)
Vehicle:	Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)
Part No.	011SAT0134G & 011SATW0134G




48. With The Snorkel body in its final Position on the vehicle and all joints thoroughly sealed - Fully tighten the screws that hold the “A” Pillar bracket to the vehicle.
49. Check & tighten all Fasteners on the snorkel body and all pipe work & clamps. Re-Check all hose clamps & connections.
- Important:** - Ensure all plastic joints are watertight and fully sealed.



50. Refit the Plastic Inner guard / fender liner, Fender Flare and mud flap as described in steps 4, 5 and 6 above using all the original clips and fittings.
51. Refit the front Right-hand wheel to vehicle (if removed) for snorkel fitting at step 1.

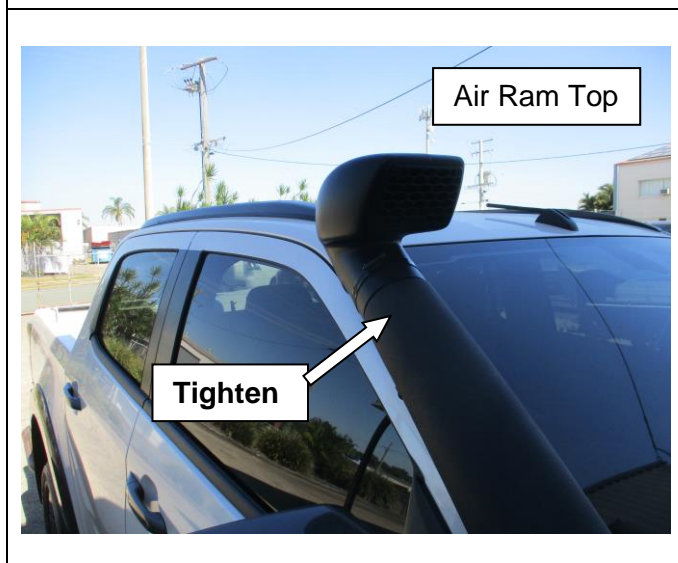

52. Fix Either the Air Ram Top or Wedge Tail Top to the snorkel Body, secure with the hose clamp provided and Tighten.
53. **CAUTION:** - Do Not Use any Silicone on this joint.

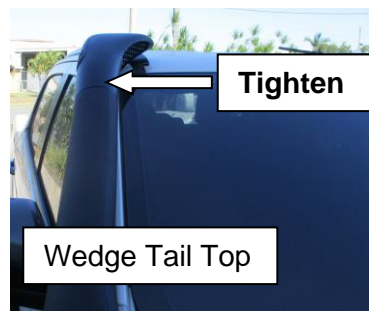



FITTING INSTRUCTIONS

Product:	TJM Airtec Snorkel (Short Body)
Vehicle:	Isuzu – D Max 2020 Onward (Thailand – Export Vehicle)
Part No.	011SAT0134G & 011SATW0134G

Final Fitment to Vehicle



Final Check – Ensure all bolts / Fasteners are Tight and Torqued to the correct torque values as tabled & specified on page 2 of these instructions.

For product warranty please refer to our website www.tjm.com.au